



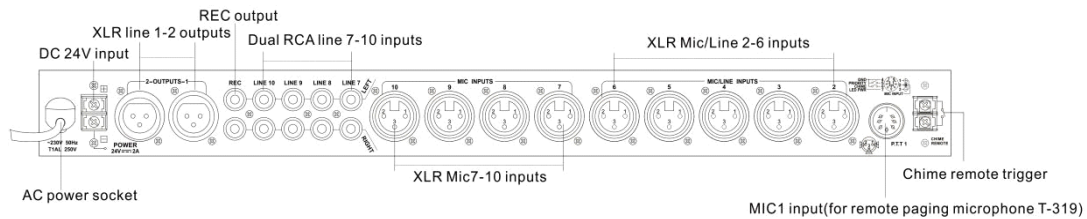

Pre-Amplifier

T-2S01

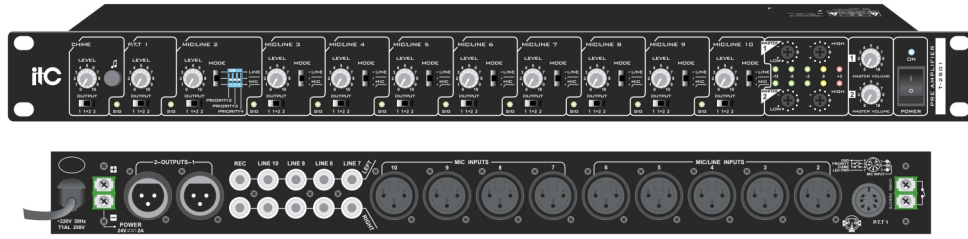

Description:

The T-2S01 pre-amplifier with multiple balanced microphone inputs and two channel outputs.

Feature:

- * Standard cabinet design (1U).
- * Each input has level indication.
- * MIC 2,3,4 is equipped with priority switch to select its priority level.
- * The high-pass filter function can be selected for the MIC input.
- * Reminding signal of bell when opening:
 - ① Optional 2-speed bell (built-in).
 - ② Automatic priority.
 - ③ The bell can be controlled with the remote microphone T-319.
- * Three output signal modes can be selected (output 1, output 1+2, output 2).
- * Two sets of output are equipped with treble and bass adjustment function.
- * Double channel output has independent level display.
- * Independent stereo line output with RCA interface (line 7-10).
- * With recording output function.
- * It can be used with T-319.

Specifications:

Model	T-2S01
Input Sensitivity/Impedance	
MIC/ Line	-50dBu (2.45mV)/5KΩ balanced -10dBu (2.45mV)/5KΩ balanced
Line RCA In	-10dBu (2.45mV)/5KΩ unbalanced
Output Level/Impedance	
Master 1, 2	Nor +4dBu/200Ω balanced
REC	Nor 0dBu/10KΩ unbalanced
Frequency Response	-0.5dB(20Hz~20KHz)
S/N Ratio	
MIC	> 60dB
Line	> 75dB
THD	
MIC	< 0.05%
Line	> 0.03%
Cross-talk	>60dB
MIC	
Line	> 75dB
Power Consumption Power	13W
Power Supply	~220V 50Hz
Dimensions	484 x 258 x 44mm
Weight	4.28Kg