




# Conference Delegate Unit

Embedded software: full digital conference audio transmission software V2.25

## TS-0236BA

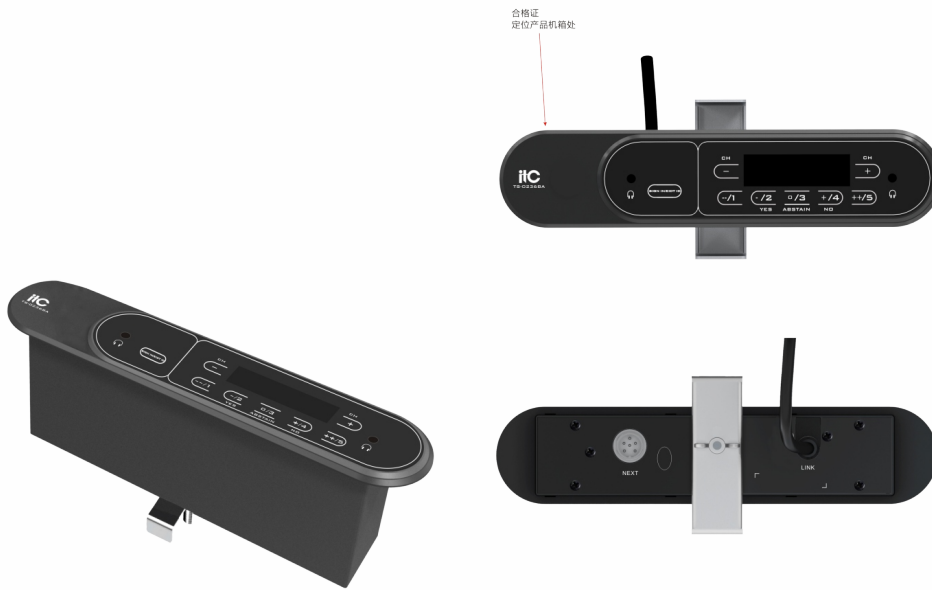

### Feature:

- \* Support voting and rating functions. Data statistics can also be realized without a PC.
- \* Support multiple language receiving channels: 15 + 1(default), 31 + 1 and 63 + 1(optional).
- \* Designed with touch buttons, no knocking noise during operation, neat and convenient.

### Specifications:

Model	TS-0236BA
Maximum power consumption	3W
Headphone load	8-32Ω
Headphone volume	40mW max
Headphone jack	3.5mm mono jack
Connector	1.8m 6-pin aviation connector
Hand in hand extension port	Support
Power supply	Conference controller power supply
Color	Black
Voting function	Five-key voting, three-key voting
Simultaneous interpretation	16 (default), 32, 64 channels
Sign-in function	Touch button sign in
Screen	OLED full view low power screen
Weight	0.5kg
Size	250×55×85mm (L×W×H)
Installation method	Embedded
Opening size	206×48mm