




Camera Tracking Controller

TS-0699

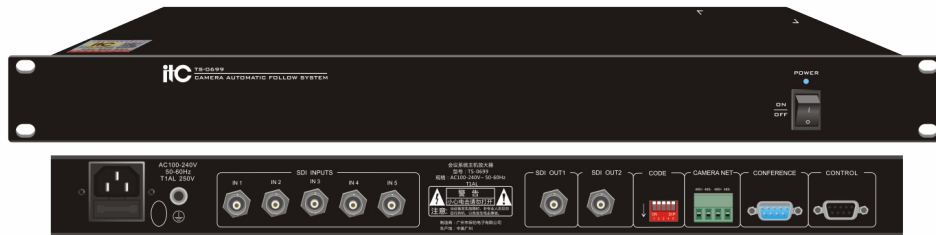

Description:

The camera tracking controller applies digital technology and video technology to the conference system products and integrates with the digital conference system to achieve the camera tracking function perfectly.

Feature:

- * 5 HD digital component serial interface (SD-SDI, HD-SDI and 3G-SDI) signal input.
- * 2 HD digital component serial interface (SD-SDI, HD-SDI and 3G-SDI) signal output.
- * Video input resolution is up to 1920 × 1080P@60Hz.
- * Video output resolution is up to 1920 × 1080P@60Hz.
- * Dial switch selects the camera baud rate and communication protocol.
- * The serial port connects with the conference controller to achieve camera tracking function.
- * 2 camera 485 control ports, up to 5 cameras can be connected.
- * Support Pelco_D protocol and VISCA camera with 485 control port.

Specifications:

Model	TS-0699
Video interface	Female port BNC connector
Gain	0dB
Lock rate	Automatic
Operating standard	SMPTE259M; SMPTE292M; SMPTE424M
Signal type	SD-SDI, HD-SDI, 3G-SDI
Maximum resolution	1920×1080P@60Hz
Return loss	<-15 dB @ 1MHz ~ 1.5GHz; <-10 dB @ 1.5GHz ~ 3GHz
Maximum rate	2.97Gbps
I/O level	0.80Vp-p+/- 10%
I/O impedance	75 Ω
Balance type	Adaptive
Maximum input distance	100 meter
Control port	1×CONTROL, 1×CONFERENCE, connect PC control or conference controller to achieve camera tracking
Power supply	AC100-240V 50~60HZ
Maximum power consumption	15W
Weight	About 3Kg
Dimension	484×210×44mm
Color	Black
Working temperature	-10°C~ +60°C
Working humidity	20%~80% relative humidity, no condensation