




# VGA HD Output Board

Embedded software: high-definition HDMI matrix output board software V5.12  
TS-9201VC

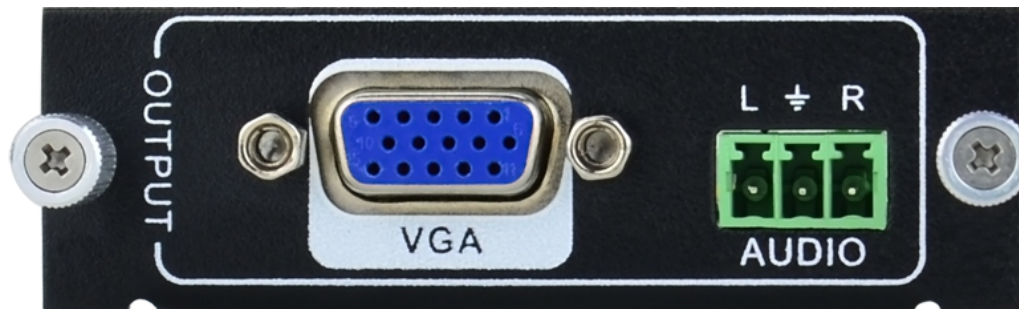

## Description:

It is specially designed for high-definition seamless hybrid matrix switcher. Support 1 VGA/CVBS/YPbPr/S-Video video signal output, support 1 stereo audio signal output, highly integrated board design. Board is optional according to needs. The number of boards brings great convenience to application and maintenance.

## Feature:

- \* The VGA port supports VGA, CVBS, and YPbPr formats.
- \* The input board automatically recognizes the signal format.
- \* Support the highest resolution 1920x1200@60Hz .
- \* VGA format resolution is adjustable: 800x600, 1024x768, 720p, 1280x1024, 1080i, 1080p (default), 1920x1200.
- \* The resolution of YPbPr format is adjustable: 720p, 1080i, 1080p.
- \* The resolution of CVBS format is adjustable: 480i, 576i.
- \* The audio on/off status of the output board can be manually set, executed by instructions, and the default is on;
- \* Plug and play, convenient to use.

## Specification:

Model	TS-9201VC
Signal interface	15P female port
Signal type	VGA, CVBS, YPBPR
Pixel bandwidth	165MHz
Interface bandwidth	4.98Gbps
Maximum resolution	1920x1200
Maximum transmission delay	<100ns
Maximum transmission distance	10M
Operating temperature	0°C~+50°C
Relative humidity	10%~90%
Maximum power consumption	4W
Weight	Net weight 0.110KG Gross weight 0.235KG