




Seamless Input Card

Embedded: HD matrix input card embedded software V4.40

TS-9404IPI

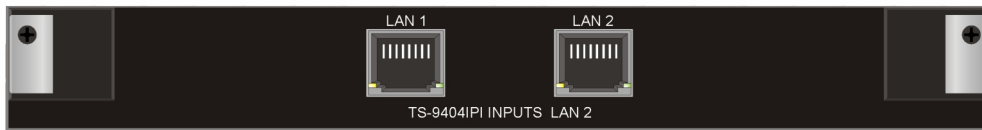

Description:

It is specially designed for smart UHD hybrid matrix in the market. It supports 4 channels of video stream signal input, supports digital HD 1080P signal, featuring high integration. The quantity of the boards is optional as needed. It is very convenient for application and maintenance.

Feature:

- * Support 2 standard RJ45 Gigabit Ethernet ports, decoding 4 rtsp video streams, decoding Hikvision, Dahua and other cameras on the market;
- * Support fast and seamless switching, no flicker, no black screen;
- * Support power-off memory protection function;
- * Support the maximum resolution of 1920X1080P@60;
- * Support hot swap, plug and play, convenient to use.

Specification:

Model	TS-9404IPI
Input channel	4 channels of rtsp video stream
Video standard	H.264HP, MP
Network interface	Two 802.3ab 1000Base-T Gigabit network interfaces
Network protocol	Support RTSP protocol
Transmission distance	Up to 100m (30m recommended)