




# Column Speaker

## KP-1203H

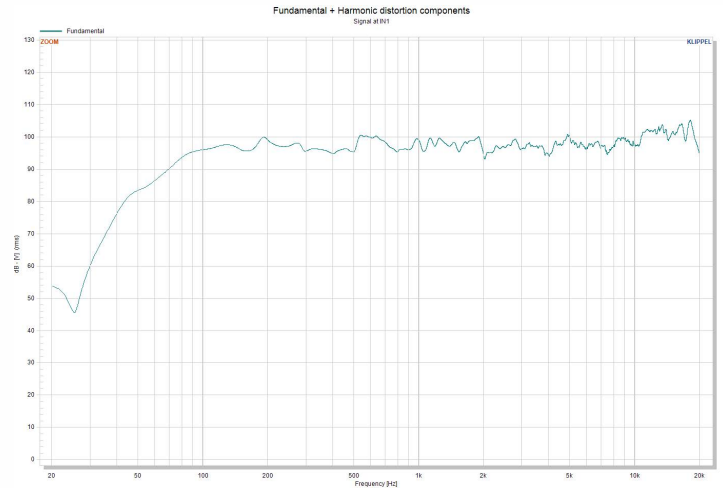

### Feature

- \* Adopt twelve 3-inch full range speaker units imported from Italy.
- \* The housing adopts 12mm high-quality high-density board, precise CNC processing, wear-resistant spray paint treatment.
- \* Accurately designed speaker frequency response can optimize the high fidelity reduction of the human voice.
- \* Spliced array design achieves a wider sound field coverage with fewer speakers.
- \* All-aluminum and all-gold decorative panels are used on the top and bottom, neat and beautiful.
- \* Applicable to large multipurpose halls, theaters, stadiums, outdoor performances, etc.

### Specification:

Model	KP-1203H
Rated power	400W
Peak power	1600W
Max SPL(rated/peak)	122dB/128dB
Nominal impedance	6 Ω
Frequency response	60Hz-20KHz
Sensitivity	96dB(1M/1W)
Speaker unit	3" full range speaker 12
Color	Black
Net weight	21.1 kg
Dimension	1500×180×200mm