




Professional Speaker KP-608

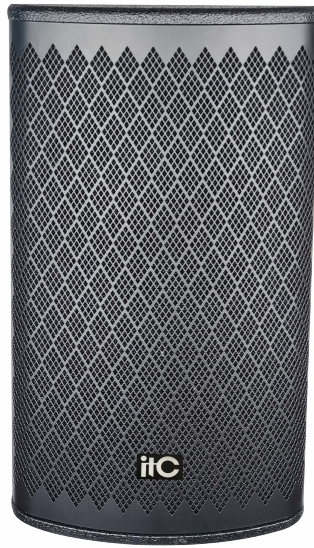

Description

Applicable to: conference halls, banquet halls, multi-function halls, high-end clubs, etc.

Features

- * The cabinet adopts 12mm+15mm high-density fiberboard CNC cutting technology, which is light in weight. The surface adopts water-based spray paint process, which is stable and wear-resistant and extends the service life.
- * The shell adopts inverted phase and trapezoidal structure design. The size and proportion of the cabinet are designed to cleverly avoid cabinet standing waves and reproduce rich bass.
- * Hard and thick rigid grille protection, integrated stamping molding, and covered with 5mm high sound transmittance acoustic mesh, which can prevent dust or liquid from entering and affecting the sound quality, protect the speaker, and increase the service life.
- * Using an 8-inch ferrite mid-bass speaker unit and a 1.4-inch annular polyethylene diaphragm compression tweeter unit.
- * Classic two-way design, using high-purity oxygen-free copper inductors and high-quality filter components, coupled with careful adjustment by professional acoustic engineers, the treble is bright and rich, the low frequency is rich, and the vocals are clear and clear.
- * Perfect installation structure and installation point design.

Specification:

Model	KP-608
Impedance	8Ω
Frequency response	60Hz~20KHz
Rated power	200W
Peak Power	800W
Sensitivity	96dB/W/M
Max SPL(rated/peak)	119dB/126dB
Coverage angle	(H)80° (V)60°
Tweeter	1.4" compressed tweeter × 1
Woofers	8" woofer × 1
Dimension (H×W×D)	246×243×442mm
Weight	9.5kg