




# Column Speaker

## KP-803CW

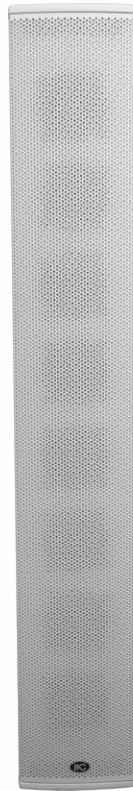

### Feature

- \* Adopt eight 3-inch full-range speaker units.
- \* The cabinet adopts 12mm high-quality high-density board, precise CNC processing, wear-resistant spray paint treatment.
- \* The accurately designed frequency response can optimize the high fidelity reduction of the human voice.
- \* Spliced array design achieves a wider sound field coverage with fewer speakers.
- \* Applicable to large multipurpose halls, theaters, stadiums, outdoor performances, etc.

### Specification:

Model	KP-803CW
Rated power	300W
Peak power	1200W
Nominal impedance	4Ω
Frequency range	70Hz-20KHz
Sensitivity	95dB(1M/1W)
Speaker unit	3" full range speaker × 8
Horizontal coverage angle	110°
Vertical coverage angle	100°
Color	White
Maximum SPL (rated/peak)	119dB/125dB
Net weight	10.6kg
Dimension	970×150×195mm