




Linear Array Speaker

TK-L205

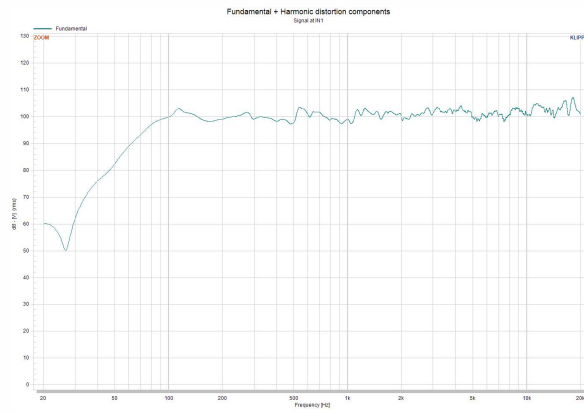

Description:

- * High-quality plywood housing, small in size and light in weight, wear-resistant paint treatment.
- * Adopt two 5" neodymium magnet mid-woofer units and one 1.73" neodymium magnet tweeter driver, with high sensitivity.
- * The precisely designed crossover optimizes the power response and the vocal MF expressiveness.
- * The combination of hoisting installation and linear array design allows 0-10 degrees of adjustable coverage area of the speakers.
- * Professional hanger combination, simple hanging method, convenient engineering assembly.
- * It has a wide range of applications. It works with TA professional amplifiers and audio processors. It is applicable to conference rooms, multipurpose halls, and banquet halls.

Specification:

Model	TK-L205
Speaker type	2-frequency linear array speaker
Rated power	200W
Peak power	800W
Nominal impedance	8Ω
Frequency range	65Hz-20KHz
Sensitivity	100dB
Maximum SPL (rated/peak)	123dB/129dB
Woofer	5" woofer ×2
Tweeter	1.73" compressed driver×1
Horizontal coverage angle (-6dB)	120°
Vertical coverage angle (-6dB)	10°
Weight	9.2kg
Dimension (H×W×D)	(167+118)×455×315mm