




# Linear Array Speaker

## TK-S125

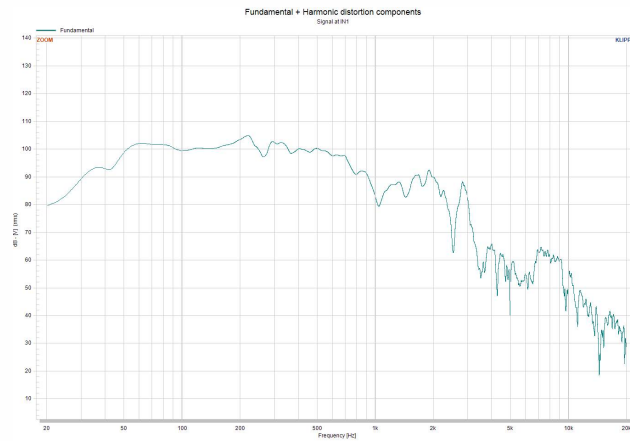

### Description:

- \* High-quality plywood housing, small in size and light in weight, wear-resistant paint treatment.
- \* Adopt two 5" neodymium magnet mid-woofer units and one 1.73" neodymium magnet tweeter driver, with high sensitivity.
- \* The precisely designed crossover optimizes the power response and the vocal MF expressiveness.
- \* The combination of hoisting installation and linear array design allows 0-10 degrees of adjustable coverage area of the speakers.
- \* Professional hanger combination, simple hanging method, convenient engineering assembly.
- \* It has a wide range of applications. It works with TA professional amplifiers and audio processors. It is applicable to conference rooms, multipurpose halls, and banquet halls.

### Specification:

Model	TK-S125
Speaker type	Subwoofer
Rated power	500W
Peak power	2000W
Nominal impedance	16Ω
Frequency range	45Hz-500Hz
Sensitivity	99dB
Maximum SPL (rated/peak)	126dB/132dB
Woofer	12" ×1
Tweeter	1.73" compressed driver×1
Horizontal coverage angle (-6dB)	120°
Vertical coverage angle (-6dB)	10°
Weight	20kg
Dimension (H×W×D)	360×455×400mm