




Column Speaker

TS-603H



Fundamental + Harmonic distortion components
Signal: 01111

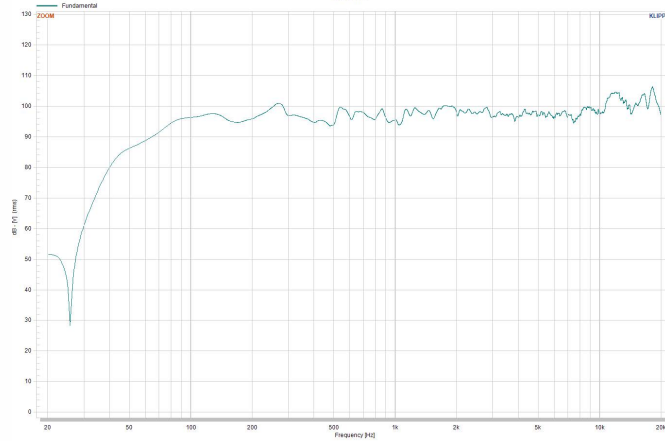

Feature

- * Adopt six 3-inch full-range speaker units imported from Italy.
- * The cabinet adopts 12mm high-quality high-density board, precise CNC processing, and wear-resistant spray paint treatment.
- * The precisely designed speaker frequency response can optimize the high-fidelity reduction of the human voice.
- * Spliced array design achieves a wider sound field coverage with fewer speakers.
- * All-aluminum and all-gold decorative panels are used on the top and bottom covers, which is neat and beautiful.
- * It is suitable for large multipurpose halls, theaters, stadiums, outdoor performances, etc.

Specification:

Model	TS-603H
Rated power	200W
Peak power	800W
Maximum SPL(rated/peak)	118dB/124dB
Nominal impedance	6Ω
Frequency response	80Hz-20KHz
Sensitivity	95dB(1M/1W)
Speaker unit	3" full range speaker × 6
Net weight	10.4kg
Dimension	755×180×200mm