



# Microphone pole

## TS-M250B1



### Feature

\* Support pickup function.


\* Support microphone status indication function, the red light is for speaking, and the green light is for speaking application.

### Specification

|                                  |  |
|----------------------------------|--|
| Microphone type                  | Cardioid directional electret microphone |
| MIC directivity                  | Cardioid                                 |
| Frequency response               | 80Hz~16kHz                               |
| Microphone input impedance       | 680Ω                                     |
| Sensitivity                      | -41±1.5dB (0dB=1V/Pa, at 1KHz)           |
| Max SPL                          | 120dB                                    |
| SNR                              | >65dB(A)                                 |
| Power supply                     | Microphone power supply                  |
| Microphone pole length and color | 250mm Black                              |
| Weight                           | 83.5g                                    |

### Φ9.7 Microphone core graphics coordinates

Frequency response curve

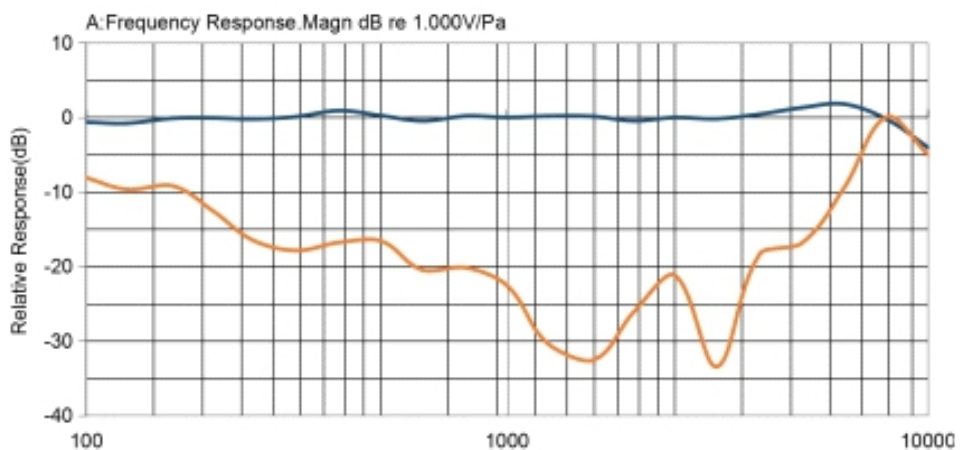



# Microphone pole

## TS-M250B1

Microphone cardioid pattern

