




## TR-0640GJ Content management terminal

### Embedded software: Information publishing, editing and management service software V1.6

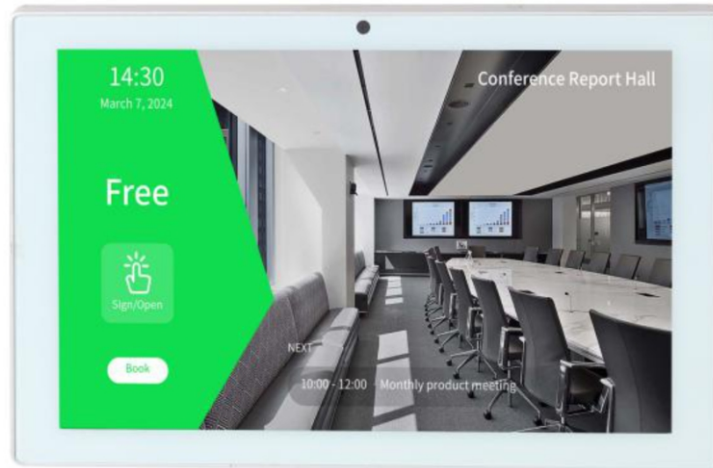

## Description

The conference content management terminal is used to display the conference information pushed by the conference platform. The occupancy status of the conference room can be checked through the screen. It supports quick booking of meetings, cancellation/extension/early termination of meetings; it supports QR code scanning and face recognition check-in.

## Features

- \*It uses a 10.1-inch capacitive multi-touch screen with a resolution of 1280\*800 .
- \*Thin body, overall thickness 27mm, the device is formed with a high-precision middle frame mold
- \*Supports DC12V/2.6A power supply and POE power supply .
- \*Supports background setting of scheduled power on/off and restart tasks, providing a convenient management method.
- \*Supports batch adjustment of device volume to meet volume requirements in different environments.
- \*Supports background remote update of software version to keep system functions updated and optimized.
- \*Supports customized LOGO, company name, font, form , display language and other information to meet personalized needs.
- \*It adopts a simple and elegant interface design, which can timely and accurately understand the availability and reservation status of the conference room.
- \*It supports three check-in methods: scanning QR code, face recognition, and handwriting , and provides a variety of convenient check-in methods for users to choose from.
- \*It supports the integration of OA, mobile APP, exchange, etc., meeting the needs of enterprises to maintain their original meeting habits and increase the display of conference room reservation information.
- \*Supporting customization and flexible configuration , the product can be customized to meet various needs through hardware upgrades or additional installations, providing flexible configuration solutions.
- \*Built-in relay module supports controlling the magnetic door lock switch through face recognition linkage.
- \*Supports display of English and Russian interfaces for users to choose .



# TR-0640GJ Content management terminal

## Embedded software: Information publishing, editing and management service software V1.6

### Specification

<b>CPU</b>	Rk3568, quad-core 64-bit, Cortex-A55, 2.0G
<b>RAM</b>	LPDDR-2G
<b>Memory</b>	EMMC-16G built-in (expandable TF card)
<b>Operating system</b>	Android 11.0
<b>Display</b>	LED backlight LCD screen A specification
<b>Resolution</b>	1280 × 800
<b>Viewing area</b>	216.5 × 135 mm
<b>Contrast ratio</b>	2000:1
<b>Brightness</b>	300cd/m2
<b>Screen ratio</b>	16:10
<b>Touchscreen</b>	10.1-inch capacitive touch screen
<b>Light bar</b>	IO port protocol, built-in seven-color LED light bar
<b>Media playback</b>	Video formats: MPEG-1,MPEG-2,MPEG-4,H.263,H.264,VC1,RV Audio format: MP3/WMA/AAC Image format: jpeg
<b>Trumpet</b>	8Ω 1W×2
<b>Camera</b>	Front 200W
<b>Communication interface</b>	1, 10M/100M/1000M adaptive Ethernet
<b>Back port</b>	Supports Ethernet port and 485 serial port output, suitable for embedded installation
<b>Side control interface</b>	Dry contact NO/NC/COM interface
<b>Other interfaces</b>	2 external USB 3.0 ports (1 for USB_OTG)
<b>WiFi/3G/4G/Bluetooth</b>	Support WIFI-2.4G, BT-4.1
<b>POE</b>	Support, IEEE802.3at/af
<b>Powered supply</b>	Support POE/DC12V power supply
<b>Power consumption</b>	≤12W
<b>Standby power consumption</b>	≤1W
<b>Working temperature</b>	-5°C ~ 45°C (operating temperature of the screen is 0°C-40°C)
<b>Operating temperature</b>	0°C-40°C
<b>Operating humidity</b>	30% ~ 85%
<b>Storage temperature</b>	-10°C ~ 50°C
<b>Storage humidity</b>	10% ~ 90%
<b>Altitude</b>	Below 2000 meters
<b>Color</b>	Silver
<b>Gross weight (packaging)</b>	2kg
<b>Packing size (width x height x thickness)</b>	309×270×55mm
<b>Weight</b>	1.3kg
<b>Dimensions (L×W×D) mm</b>	253.5×163.5×30mm