




Paging Microphone VA-6200RM



Back Panel:

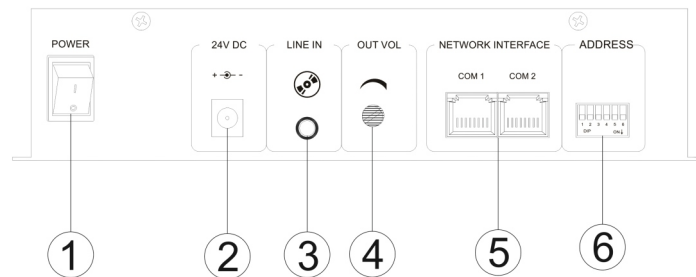

Connectors:

1. Power switch
2. DC voltage input
3. Line Sound source input
4. Output volume adjustment
5. CAN Communication network port
6. Dial code setting:(Upward: Use Down: Close)

Features:

- * Support 16 zones, group paging button.
- * System max support 32 remote paging microphones.
- * Microphone support anti-misoperation plug.
- * Support line audio input, and input/output volume is adjustable.
- * Paging priority can be set by software.
- * Support 24 DC power supply.
- * Remote MIC/Controller has 2 cascade interfaces, 1 in and 1 out.
- * Optional paging to the main controller or extension controller.

Specifications:

Model	VA-6200RM
MIC	Capacitor Microphone
MIC Sensitivity	10mV/600Ω
MIC Frequency Response	200Hz~10KHz
MIC SNR	>65dB
Line Input Sensitivity	775mV/10KΩ
Line Input Frequency Response	80Hz~16KHz
Line Input SNR	>70dB
Signal Output	1V
Distortion	<1% (Rated output power), 1KHz
Supply Voltage	24V DC
Dimension (L x W x D)	256 x 52 x 149mm
Net Weight	1.3kg