




# FAS Short Circuit Board CF1 (VA-6500C)

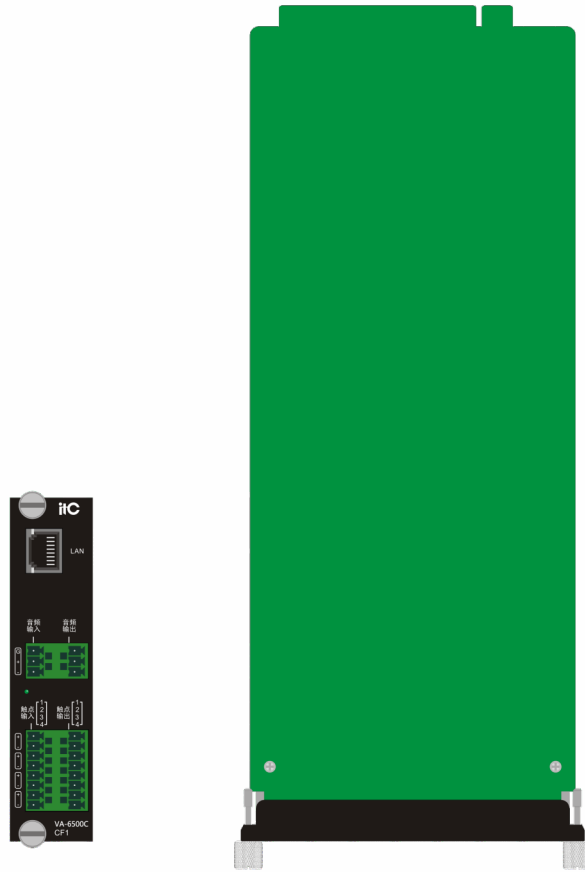

## Features:

- \* Collect the external input status signals and upload them to the interface controller.
- \* Receive the control commands from the interface controller to control the executing actions of the external output interface.
- \* Receive the scheduling commands to collect audios and play them to the designated zones.
- \* Receive the scheduling commands to output the corresponding audio signals.
- \* Report the working status of the equipment: online status, failure status, etc.

## Specification:

Model	VA-6500
Network interface	RJ45*1, 10/100 Mbps adaptive, IGMP, TCP/IP protocol
External input interface	4-channel programmable triggering inputs
External output interface	4-channel relay programmable outputs
Audio input	Balanced/unbalanced * 1, $\pm 0.385$ V (balanced), 0.775 V (unbalanced)
Audio output	Balanced output * 1, $\pm 0.375$ V, TDH 0.1%, 80 ~ 16kHz
Supporting board quantity	A maximum of 8
Size	263 × 124 × 30
Weight	0.3 kg