



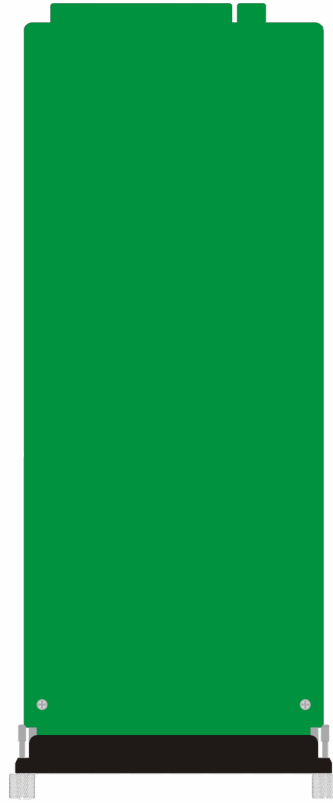

PA3 (VA-6501P) Amplifier Board



Features:

- *Digital decoding amplifier board
- *Efficiency Class D amplifier
- *Built-in digital decoder to decode network audio directly
- *Support disconnected local emergency audio input broadcast
- *Loop state detection for output zones
- *Support the backup mode of 4-main-1-standby, 5 amplifier boards
- *Support the real-time indication of the working state of the amplifier board
- *Support automatic switching of amplifier board failure
- *Support uninterrupted maintenance and repair, and use the start-stop function on the module

Specification:

| | |
|---------------------------|---|
| Model | VA-6501P |
| Input Voltage | ± 85 V DC |
| Output Voltage | 100V |
| Output Power | 350W |
| THD | $\leq 1\%$ (rated output power), 1KHz |
| Frequency response | 40Hz-16KHz (+1dB,-3dB) |
| SNR | ≥ 80 dB |
| Heat dissipation mode | Forced air cooling |
| Protection mode | Over-voltage, over-current, high temperature, overload and short circuit protection |
| Amplifier input | Digital signal and 100V emergency audio signal |
| Emergency audio interface | Balanced Input |
| Dimension | 302×124×60mm |
| Weight | 1.1 kg |