




VA-6511 Broadcast Booster

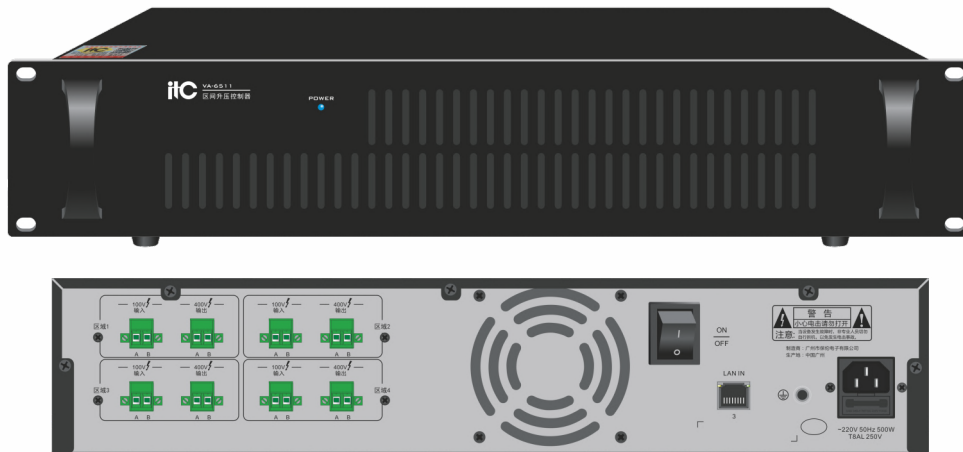

Description:

The weak current room or equipment room installed in each area can be connected with 4 100V constant-voltage amplifiers for audio constant-voltage output boost function.

Features:

*Standard 19-inch rack design, all-aluminum panel, professional mechanical assembly process, high-grade appearance.

*Built-in 4 sets of independent constant voltage 100V input interfaces, each group provides 4 sets of independent constant voltage 400V output after boosting through the internal audio transformer of the equipment.

*The optimized 100V constant voltage output is attenuated after long-distance transmission, and a longer sound reinforcement transmission distance is achieved through internal audio boosting.

Specification:

Model	VA-6511
100V constant voltage input power	≤ 100 W
100V constant voltage input interface	4 sets of standard industrial grade crimp terminals
400V constant voltage output interface	4 sets of standard industrial grade crimp terminals
Audio conversion efficiency	95%
Frequency response	80Hz ~ 16kHz, + 1dB, -3dB
SNR	≥ 70 dB
Dimension	484 × 300 × 88 mm
Weight	20kg
Power supply	Passive
Operating humidity	5% ~ 95%
Operating temperature	-20 ~ 60°C