




Broadcast Controller

VA-6500 (Specification: CC21)

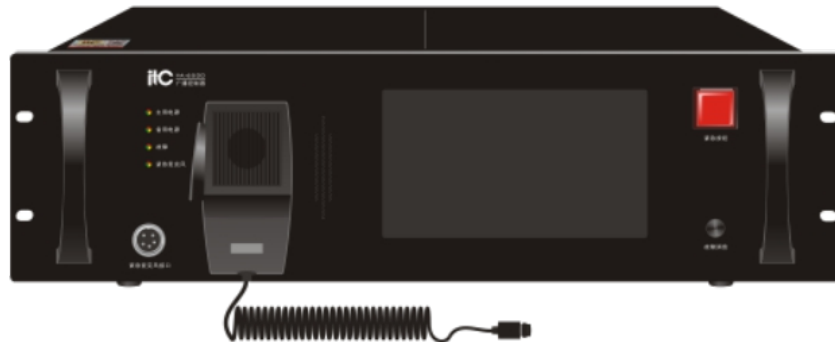

Feature

- * With a 7-inch touch screen to view device status, zone status, current monitoring status, etc.;
- * Adopt plug-in design, support the access of multiple function boards to expand the function of the system, and support mixed plug-in and hot swap.
- * Various board options such as telephone, line input, radio, dry node, four-color light control interface, etc.;
- * With different LED indicators to identify the status of the device, and support the display of the working status and fault status of the device;
- * Support PTT emergency microphone: PTT status detection, PTT all zones paging, PTT input sensitivity adjustment;
- * Built-in monitoring speaker supports the end monitoring of any zone in the system, and the output volume of the monitoring speaker can be adjusted;
- * Support dual power supply design, two power supply boards are connected at the same time for mutual redundancy. When the main power supply fails, it will automatically switch to the backup power supply.

Specification

Dimension	3U standard cabinet
Display screen	7-inch touch screen, resolution: 1024 * 600
Monitoring speaker	8 ohms, 5W, cavity speaker
Supporting board quantity	A maximum of 14 small boards
Size	484×437×132
Weight	6.85kg