




City Emergency Intercom Unit

T-6711

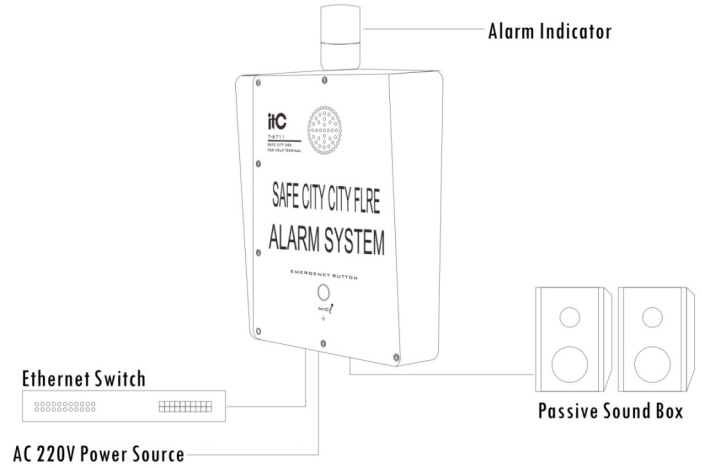

Description:

The T-6711A is an intercom terminal for emergency with one button for help function, it is professional communication system for the city, large park, tunnel, mining plant, can be used for broadcasting and playing the background music.

Features:

- * Metal case with roast painting, waterproof & explosive-proof, sturdy and durable, it could be fixed on the outdoor montant.
- * Embedded PC technology, built-in DSP and high speed industrial chip to ensure start time less than 1 second.
- * Built-in single network hardware audio decoding module, support TCP/IP, UDP, IGMP (Multicast) protocol, transmit 16-bit audio signal as same as CD quality through network transmission.
- * Built-in voice intercom module, with high-performance DSP audio processor, support digital echo cancellation and audio compression.
- * Built-in 5W hi-fi speakers to ensure clear and loud sound; built-in 50W resistance amplifier for outdoor PA require.
- * Built-in high sensitivity microphone, support hands-free call, custom reply, long distance voice pick up and original sound output.
- * Built-in monitor, support service level recording management, built-in auxiliary IO, complete the perfect monitor system.
- * One short circuit input and one short circuit output; input is used for the signal and data correcting, the output is for monitor video linkage.
- * Independent power supply, the amplifier stay mute model when no BGM or emergency.
- * Built-in a controlled power, used for actuating the alarm lamp and warning facility.
- * Support custom call, one button for fast call, one button for help.
- * Support for multiple call model, including call waiting, call forwarding, no answer reminder.
- * Support call forwarding time, no answer time, the call waiting time setting.
- * Support call forwarding manually and automatically, call forwarding number could be set.
- * Support fast play program preset, support remote trigger for network broadcast .
- * Optional hang up modes, initiative or passive mode.
- * Support PSTN telephone broadcast, voice message broadcast.
- * Support mobile WIFI on demand, wireless remote controller on demand.
- * IP55 protection design, aluminum body for waterproof level and explosive-proof design, special anti-dismounting screw is supplied for fix up.
- * Support DHCP, compatible router, switcher, bridges gateway, Modem, Intelnet, 2G, 3G, 4G, multicast, unicast and so on.
- * Digital, easy expansion, no geographical restriction, no additional management equipment, without cables construction , easy installation.
- * 24V DC power supply is customized to satisfy outdoor solar battery power supply needs.

Specifications:

Model	T-6711
Network Interface	Standard RJ45 input
Communication Protocol	TCP/IP, UDP, IGMP (multicast)
Audio Format	Mp3
Sampling Rate	8K~48KHz
Transmission Speed	100Mbps
Audio Mode	16-bit CD sound quality
Frequency Response	80Hz~16KHz
T.H.D	≤1%
S/N Ratio	>70dB
Working Temp	-20℃~60℃
Humidity	20%~80% Relative humidity, without condensation
Power Consumption	≤100W
Power Supply	~220-240V 50/60Hz
Protection Level	IP55
Dimensions	480 x 370 x 130mm
Weight	9.7Kg