



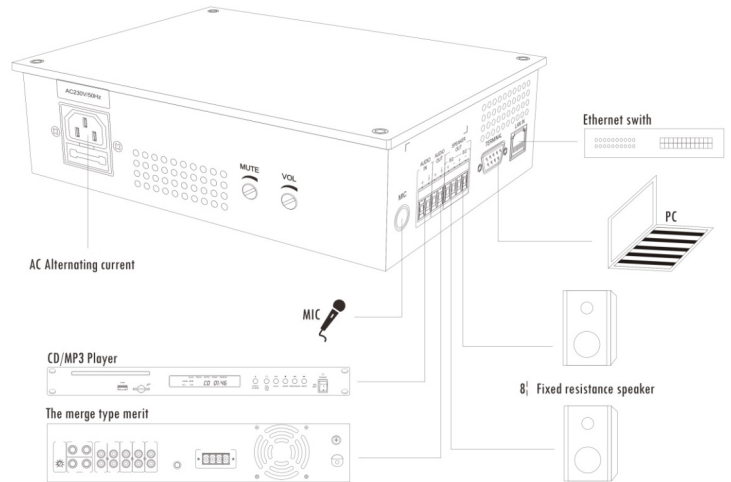

IP Network Adapter (With Constant Resistance Amplifier)

T-6706

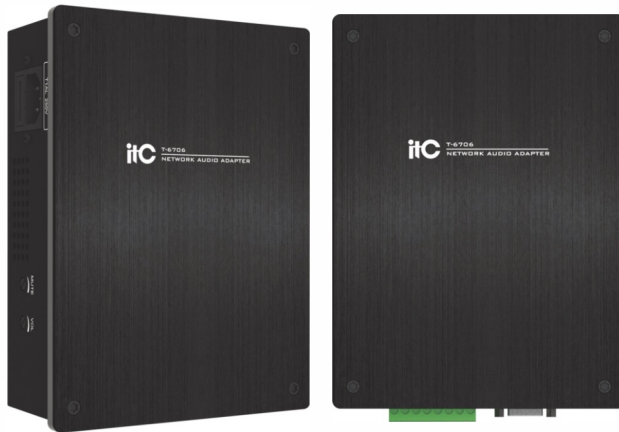

Descriptions

Apply to ordinary classrooms, multimedia classrooms, offices, meeting rooms and other places of broadcast and local broadcast.

Features

- * Standard wall-mounted design, black brushed aluminum panels, exquisite appearance, sophisticated technology, filling high-grade temperament.
- * It is with embedded computer technology and DSP audio processing technology design. High-speed industrial-grade chips, the start-up time is less than 1 second.
- * Built-in single network hardware audio decoding module, support TCP/IP, UDP, IGMP (Multicast) protocol, transmit 16-bit audio signal as same as CD quality through network transmission.
- * Built-in 2 x 15W impedance output amplifier module, sound fine, strong power.
- * 1 channel audio signal auxiliary output interface, scalable external power amplifier.
- * 1-local microphone input, a line input, you can adjust the volume, to achieve local PA.
- * Built-in audio processing circuitry to support multi-channel signal amplification, mixing, support three class audio priority management.
- * Support remote media-on-demand capabilities, on-demand programming supports English coach playback mode (AB repeat).
- * Support 1000 classes audio priority control.
- * Support PSTN phone broadcasting, support SMS voice broadcast.
- * Support mobile WIFI on demand, wireless remote control on demand.
- * Support panel serial port expansion on demand, to achieve remote programming on demand, program selections, adjust the volume.
- * Support server management functions authorized to operate a unified, unified configuration management user and password.
- * Support digital audio playback breakpoint passage of time, to ensure that the broadcast synchronization effect.
- * Support DHCP, compatible routers, switches, bridges, gateways, modem, internet, 2G, 3G, 4G, multicast, unicast and other random network structure.
- * Imitation iOS tiled menu management, elimination of complex secondary menu.
- * Support the new configuration registered intelligent voice prompts.
- * Support ESD protection, built-in network isolation mine processing circuit.
- * 1 channel to download the PC serial port IP address, is used to modify the IP address of network decoding module.
- * Digital products, expansion of convenience, without geographical restrictions, no additional room management equipment, total net free line construction design, easy to install.

Specifications:

Model	T-6706
Network Input	Standard RJ45
Communication Protocol	TCP/IP, UDP, IGMP(multicast)
Audio Mode	Mp3
Sampling Rate	8K ~ 48KHz
Transmission Speed	100Mbps
Audio Mode	16-bit CD sound quality
Frequency Output	80Hz~16KHz
T.H.D	≤1%
S/N Ratio	>75dB
External Speaker Output	2 x 15W Industry standard press-line connecting terminals
Impedance and Power	
Aux line Input level	350mV, industrial standard press-line connecting terminals
Audio Output Level	1000mV, industry standard press-line connecting terminals
Line Out Output Impedance	470Ω
MIC Input Sensitivity	5mV
Working Temp	5°C~40°C
Humidity	20%~80% Relative humidity, without condensation
Power Consumption	≤50W
Power Supply	~220-240V 50/60Hz
Dimensions	187 x 139 x 60mm
Weight	1.52Kg