

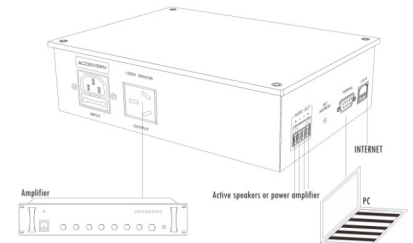




IP Network Adapter

T-6708

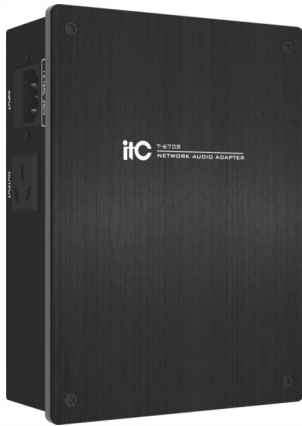

Descriptions

Install in low voltage room, low voltage box or sentinel-controlled room, classrooms, guess rooms and other places, connect external power amplifier or active speakers.

Features

- * Standard wall-mounted design, black brushed aluminum panels, exquisite appearance, sophisticated technology, filling high-grade temperament.
- * Equipment with embedded computer technology and DSP audio processing technology design. high-speed industrial-grade chips, start-up time of less than 1 second.
- * Built-in single network hardware audio decoding module, support TCP/IP, UDP, IGMP (Multicast) protocol, transmit 16-bit audio signal as same as CD quality through network transmission.
- * 2 line output, connect external power amplifier or active speakers.
- * 1 channel 500W intelligent output power outlet, can remote management via Ethernet, support software programming pre-opening function.
- * An IP address reset button, if you lose the IP address, can restore factory default.
- * Support 1000 classes audio priority mute control.
- * Support PSTN phone broadcasting, support SMS voice broadcast.
- * Support mobile WIFI on demand, wireless remote control on demand.
- * Support panel serial port expansion on demand, to achieve remote programming on demand, program selections, adjust the volume.
- * Support server authorized to operate a unified management, unified configuration management user and password.
- * Support at least three kinds of high security authorization IP configuration, the safety factor is much higher than the Web and other remote configuration.
- * Support digital audio playback breakpoint passage of time, to ensure that the broadcast synchronization effect.
- * Support DHCP, compatible routers, switches, bridges, gateways, Modem, Internet, 2G, 3G, 4G, multicast, unicast and other random network structure.
- * Support the new configuration registered intelligent voice prompts.
- * Support ESD protection, built-in network isolation mine processing circuit.
- * 1 channel to download the PC serial port IP address, is used to modify the IP address of network decoding module.
- * Digital products, expansion of convenience, without geographical restrictions, no additional room management equipment, total net free line construction design, easy to install.

Specifications:

Model	T-6708
Network Input	Standard RJ45 Input
Communication Protocol	TCP/IP, UDP, IGMP (multicast)
Audio Mode	Mp3
Sampling Rate	8K~48KHz
Transfer Rate	100Mbps
Audio Mode	16-bit CD sound quality
Output Frequency	80Hz~16KHz
T.H.D	≤0.3%
S/N Ratio	>70dB
Audio Output Level	1000mV industry standard press-line connecting terminals
Audio Output Impedance	470Ω
Working Temp	5°C~40°C
Humidity	20%~80% Relative humidity, without condensation
Power Consumption	≤8W
Power Supply	~220-240V 50/60Hz
Dimensions	187 x 139 x 60mm
Weight	1.36Kg