

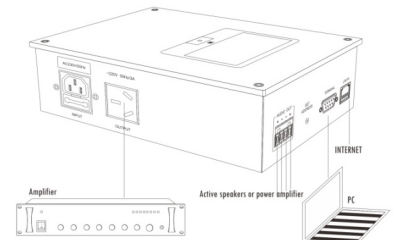




IP Network Adapter

T-6709

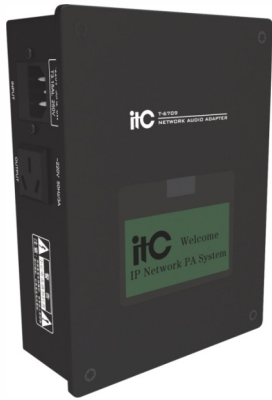

Descriptions

Installed in weak-current rooms, to connect with amplifier or active speaker.

Features

- * Wall mount, black aluminum panel, exquisite and high-class design.
- * 3.4 inch screen, to display broadcast on demand, current broadcasting. Infrared remote controller to control the playing content, easy control like play / pause, fast forward / rewind, AB repeat.
- * Adopt embedded computer technology and DSP audio processing technology; high-speed chip to ensure start-up time less than 1 second.
- * Built-in one channel network hardware audio decoding module that supports TCP / IP, UDP, IGMP (Multicast) protocol, with 16-bit audio signal as same as CD quality through network transmission.
- * 2 channel line output, to connect with amplifier or active speakers.
- * One channel 500W power output, remote management via internet, support software programming to set pre-open.
- * IP address reset button, restore the factory default setting.
- * Support up to 1000 grades user-defined audio priority mute control.
- * Support PSTN phone broadcast, support SMS voice broadcast.
- * Support mobile WIFI broadcasting, and IR remote control on-demand.
- * Support serial port expansion on-demand, remote on-demand, program selection, volume control.
- * Support authorized operation management for control center, to configure the user name and password.
- * Support digital audio playback breakpoint play, to ensure the synchronization play.
- * Support DHCP, compatible router, switcher, bridges gateway, Modem, Internet, 2G, 3G, 4G, multicast, unicast and so on.
- * Support remote broadcast on-demand, support 1000 user-defined audio priority mute control (support multi-channel signal amplifier, mixing, three priority control, volume control).
- * Support at least three kinds of high security authorization, the safety factor is higher than the Web remote configuration.
- * IOS menu management.
- * Voice prompt when new configuration Sign-in.
- * Support ESD protection, built-in anti-thunder processing circuit.
- * One channel to download IP address serial port from PC, to modify IP address of decoding module.
- * Digital, easy expansion, no geographical restriction, no additional management equipment, without cables construction, easy installation.

Specifications:

Model	T-6709
Network Input	Standard RJ45 input
Protocol Support	TCP/IP, UDP, IGMP (multicast)
Audio Formats	MP3
Sampling Rate	8K~48KHz
Transmit Speed	100Mbps
Audio Format	16-bit CD sound quality
Frequency Output	80Hz~16KHz
THD	≤0.3%
S/N	>70dB
Audio Output Level	1000mV, industrial standard press-line connecting terminals
Audio Output Impedance	470Ω
Working Temperature	5°C~40°C
Working Humidity	20%~80% Relative humidity, without condensation
Power Consumption	≤8W
Power Supply	~220-240V 50/60Hz
Dimensions	187 x 139 x 60mm
Weight	0.6Kg