



One-Key For Help Intercom Terminal

T-7703



Flush Mounted Box
T-7718




Box Dimension (L×W×D):123×72×32mm
Wall Opening Size(LxWxD):126x75x31 mm

Flush Mounted Box
T-7719




Dimension(LxWxD):129x78x32 mm


Equipped with hidden way

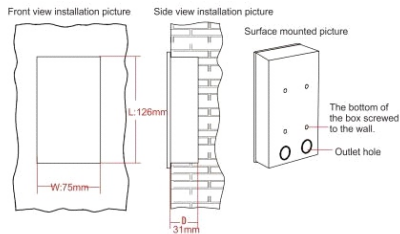

With the way

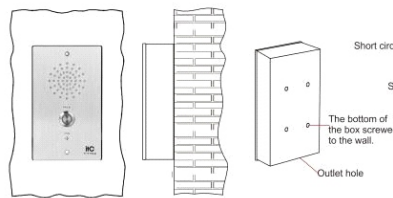

Connection mode

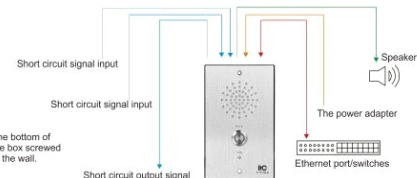

Description:

The one-button for help intercom terminal can initiate an intercom call to the command center.

Features:

- * With embedded rectangular design, simple and smooth appearance, sophisticated lines and durable quality.
- * With embedded computer technology and DSP audio processing technology.
- * One button ask for help, can call the intercom mic of the duty room. Quick connection and easy operation
- * Built-in microphone with high sensitivity, with wide area for sound collection, and high sound reproduction.
- * Built-in 3W full-range monitor speaker, with loud and clear voice.
- * Support hands-free calling and broadcast receiving.
- * Support local electronic door lock and local alarm indicator (select 1 from 2 options).
- * Support 2-channel local short-circuit signal input; linkage with 1 short-circuit output for monitoring short circuit linkage.
- * With crimp DC power supply interface, external connect to 24V power adapter or centralized power supply.
- * Two installation methods: embedded and surface mounted.
- * Waterproof degree: Ip55.
- * With 1 line output, for connecting active speaker to achieve voice paging.
- * Support short-circuit signal input of security equipment, also supports customized setting on the time plan of patrol and sign in for the local area security.
- * Support panel button linkage to 1 short-circuit output or ring alarm, for monitoring short-circuit linkage or emergency tips.
- * Support disassemble panel alarm function, at the same time to link the short-circuit output of multiple devices from local and remote, and connect to alarm or police alarm horn speaker.
- * The system supports remote hardware updating to the terminals, no need to go to the local terminal site, save a lot of maintenance work.

Specifications:

Model	T-7703
Network Interface	Standard RJ45 input
Transmission rate	100Mbps
Protocol Support	TCP/IP,UDP
Audio Format	MP3
Audio Mode	16bit CD sound quality
Sampling Rate	8K~48KHz
MIC Input sensitivity	10mV
Frequency Response	317Hz~3.4KHz
Overall Power Consumption	10W
THD	≤1%
SNR	>65dB
Operation Temperature	-20°C~60°C
Operation humidity	20%~80% Relative humidity, non-condensing
Input Power	~190-240V 50-60Hz(Adapter); DC24V/1A
Dimension	132×81×39mm
Weight	0.5Kg