



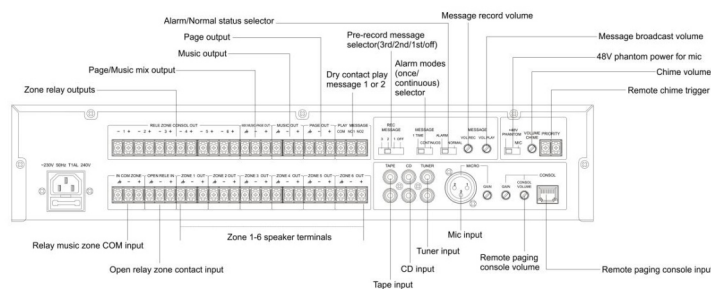

6 Zone Mixer with Voice Recorder

T-6245

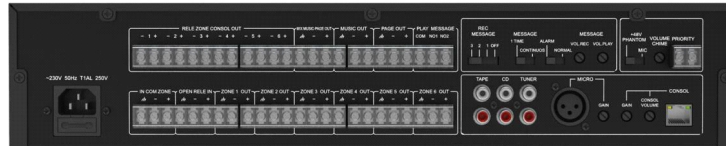

Feature:

- * Mixer with 6 zone speaker selector for source selection and zone control.
- * Built-in mic and recorder for easy voice message recording and storage.
- * 3 audio sources direct selection on front panels.
- * 6 zone selection buttons on front panel.
- * 6 zone paging console work together with the mixer through RJ45 port for remote control and announcement.
- * Mic input by XLR type with phantom power and gain control.
- * 3 aux inputs for tape, CD and tuner.
- * Built-in chime, whose remote trigger and volume is provided.
- * 3 voice messages broadcast in continuous and once modes.
- * 3 channel pre outputs: music, music/page and page.
- * 6 zone line outputs for power amplifier.
- * Volume control is provided for mic, music, mater, record and message broadcast, plus bass and treble tone control.
- * Indications include zone selector, source selector, record state, power and output level meters.
- * 4 levels of priority from high to low: remote paging console, Mic1, chime, pre-recorded message broadcast.

Specifications:

Model	T-6245
CONSOLE INPUT	
Sensitivity	5 mV/600Ω, 500mV/10KΩ
S/N Ratio	>68dB
Frequency Response	50Hz~17KHz (+1, -3dB)
MICROPHONE INPUT	
Sensitivity	5 mV/600Ω, 500mV/10KΩ
S/N Ratio	>68dB
Frequency Response	50Hz~17KHz (-3dB)
Phantom Power	+48V
3 AUXILIARY INPUTS	
Tuner and Tape Input Sensitivity/Impedance	200mV/47Ω
CD Input Sensitivity/Impedance	500mV/47Ω
S/N Ratio	>90dB
Frequency Response	20Hz~20KHz (+1, -3dB)
CONTROL	
Bass	±12dB at 100Hz
Treble	±12dB at 10KHz
Chime	2 tone active for contact free in priority and BGM
Normal Distortion	>0.05%
OPERATING CONDITION	
Power Supply	~110V-230V 50/60Hz & DC 24V
Dimensions	484 x 303 x 88mm
Weight	6.32Kg
Max number of paging console	6