



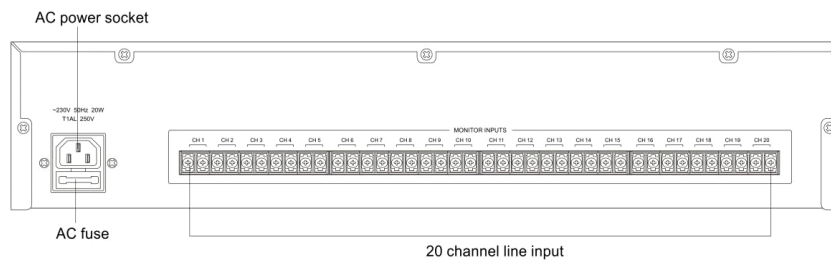

20-Channel Monitor

T-6220

Embedded software: digital audio control embedded software V1.08

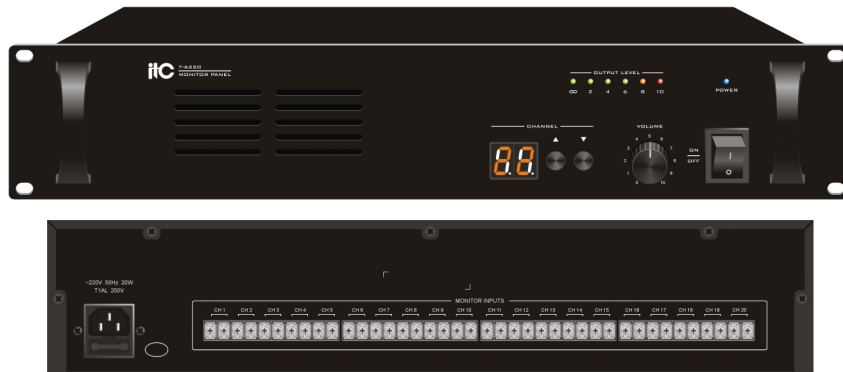

Description:

1. The device that can monitor the program playing status according to the zone.
2. It is used in the broadcast system which needs to monitor the broadcast process in real time.

Features:

- * Rack mounted design in 2U height.
 - * 20 channel monitor.
 - * Monitor volume knob.
 - * Up/Down channel functional buttons with LED display.
 - * Built-in wide band hi-fi speaker.
 - * 20 channel speaker inputs.
 - * 6 segment output level meters.
 - * Monitor available even when power off.
-
- * Standard cabinet design (2U), black aluminum oxide brushed panel, exquisite craftsmanship, showing high-end temperament.
 - * 20 line input, monitor 20 power amplifiers or 20 power partitions, and can arbitrarily select the monitored partitions.
 - * Built-in wide band hi-fi speakers, full and clear sound quality.
 - * 5-unit LED level displays the signal output of the monitoring amplifier; with high-definition digital tube to display the status of the monitoring zone.
 - * With monitor partition selection button and monitor volume adjustment button.

Specifications:

Model	T-6220
Power Supply	~220V 50Hz
Power Consumption	20W
Dimension	484 x 303 x 88mm
Weight	4.9Kg