



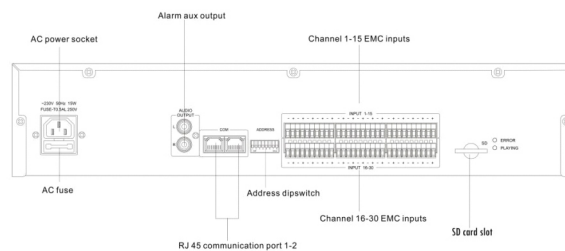

Multi-voice Alarm & Recorder Controller

T-6223(A)

Embedded software: digital audio control software V1.08

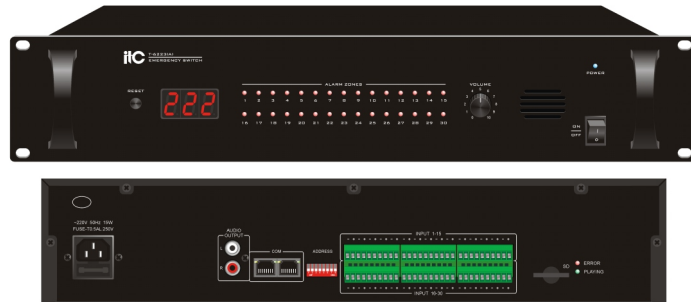

Description:

- * Interface equipment for collecting short-circuit signals from fire centers.
- * Applicable to broadcast systems that require fire alarm linkage.

Features:

- * Standard cabinet-type design (2U), black alumina brushed panel, humanized drawing, exquisite craftsmanship, showing high-grade temperament.
- * It has 30 channels of fire alarm collection interface, which can be expanded to 300 channels.
- * Two alarm acquisition trigger modes can be configured by the address code, normally closed trigger mode and normally open trigger mode.
- * Accurate alarm zone LED display; built-in high-fidelity monitor speakers for more direct monitoring.
- * Built-in digital voice alarm player, realizing a more user-friendly partition independent voice alarm function.
- * Use SD card to store alarm music, convenient management, high-fidelity sound quality, random distribution of 8G SD memory card.
- * With RJ45 communication interface, it can communicate data with the system host, built-in alarm linkage interface and adjacent layer alarm algorithm, to achieve flexible alarm functions such as whole area, partition, and adjacent layer.
- * Standby power is less than 3W, meeting national environmental protection and energy saving certification standards.

Specifications:

Model	T-6223(A)
Power Supply	~220V 50Hz
Power Consumption	15W
Communication Protocol	RS422
Communication Input	RJ45
Communication Rate	4800bps
Dimension	484 x 302 x 88mm
Weight	4.20Kg