



Ceiling Speaker




T-205BC/T-206BC/T-208BC



T-205BC

T-206BC

T-208BC

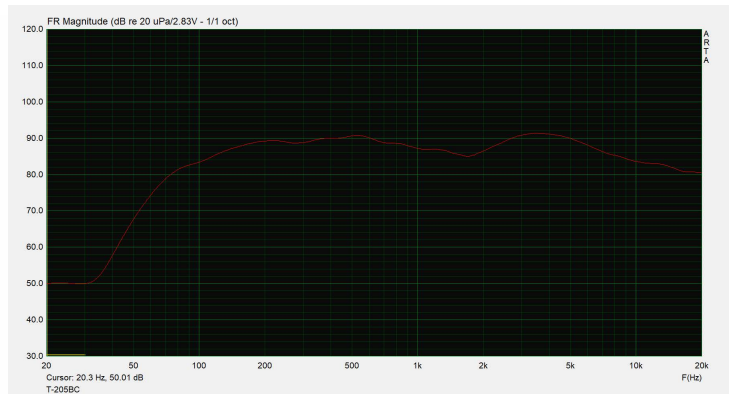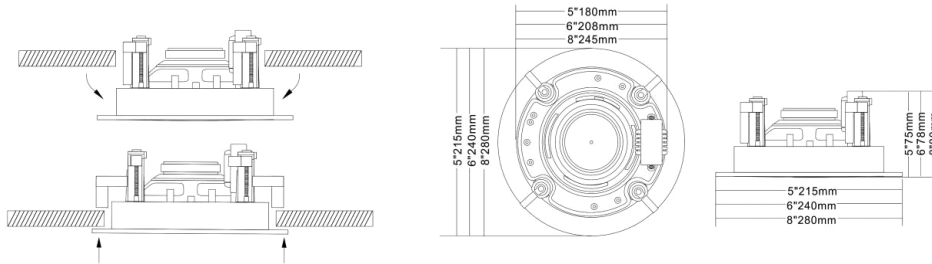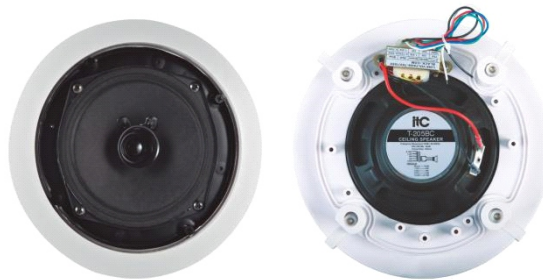

Specifications:

Model	T-205BC	T-206BC	T-208BC
Power taps @100V	0.75W, 1.5W, 3W, 6W	1.25W, 2.5W, 5W, 10W	1.87W, 3.75W, 7.5W, 15W
Power taps @70V	0.38W, 0.75W, 1.5W, 3W	0.62W, 1.25W, 2.5W, 5W	0.93W, 1.87W, 3.75W, 7.5W
Impedance	Black: Com Blue: 13.3KΩ Red: 6.7KΩ Green: 3.3KΩ White: 1.7KΩ	Black: Com Blue: 8KΩ Red: 4KΩ Green: 2KΩ White: 1KΩ	Black: Com Blue: 5.3KΩ Red: 2.6KΩ Green: 1.3KΩ White: 670Ω
SPL(1W/1M)	88dB	89dB	90dB
Max. SPL (Rated W/1M)	96dB	99dB	102dB
Frequency response (-10dB)	80-20KHz	80-20KHz	80-20KHz
Finish	Baffle: ABS, White Grille: Steel, White	Baffle: ABS, White Grille: Steel, White	Baffle: ABS, White Grille: Steel, White
Speaker driver	5" x 1	6" x 1	8" x 1
Cutout size	180mm	208mm	245mm
Dimensions	215 x 75mm	240 x 78mm	280 x 80mm
Weight	0.5Kg	0.9Kg	1.4Kg
Mounting	Flush-mount dog ears	Flush-mount dog ears	Flush-mount dog ears