




# Wall Mount Speaker (Dampproof)

## T-774H/T-775H/T-776H/T-778H

## T-774HW/T-775HW/T-776HW/T-778HW



Material: plastic

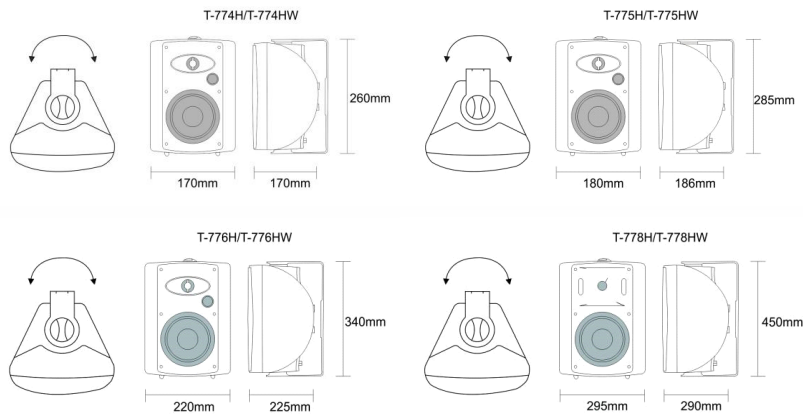

### Description:

Indoor high-grade wall-mounted speakers, multi-power fixed resistance and fixed pressure selection, modern sense of arc design, 2 frequency division design, high cost performance, convenient installation. Suitable for hotels, conference halls, etc.

### Specifications:

Model	T-774H/T-774HW	T-775H/T-775HW	T-776H/T-776HW	T-778H/T-778HW
Power taps @100V	2.5W, 5W, 10W, 20W	3.75W, 7.5W, 15W, 30W	5W, 10W, 20W, 40W	7.5W, 15W, 30W, 60W
Power taps @70V	1.25W, 2.5W, 5W, 10W, 20W	1.9W, 3.75W, 7.5W, 15W, 30W	2.5W, 5W, 10W, 20W, 40W	3.75W, 7.5W, 15W, 30W, 60W
Max power	40W	60W	/	120W
Input	70V/100V/8Ω	70V/100V/8Ω	70V/100V/8Ω	70V/100V/8Ω
Sensitivity(1W/1M)	86dB	88dB	89dB	89dB
Impedance	4KΩ/2KΩ/1KΩ/500Ω/250Ω	2.6KΩ/1.3KΩ/670Ω/330Ω/165Ω	2KΩ/1KΩ/500Ω/250Ω/125Ω	1.3KΩ/670Ω/330Ω/165Ω/81Ω
Frequency response (-10dB)	80Hz -20KHz	80Hz -20KHz	80Hz -20KHz	80Hz -20KHz
Speaker driver	4" x 1 1.5" x 1	5" x 1 1.5" x 1	6" x 1 1.5" x 1	8" x 1 2" x 1
IP rate	IP66	IP66	IP66	IP66
Dimensions	260 x 170 x 170mm	285 x 180 x 186mm	340 x 220 x 225mm	450 x 295 x 290mm
Weight	2.3kg	2.7kg	4.1kg	6.5kg