




# Wall Mounted Speaker

## T-776A

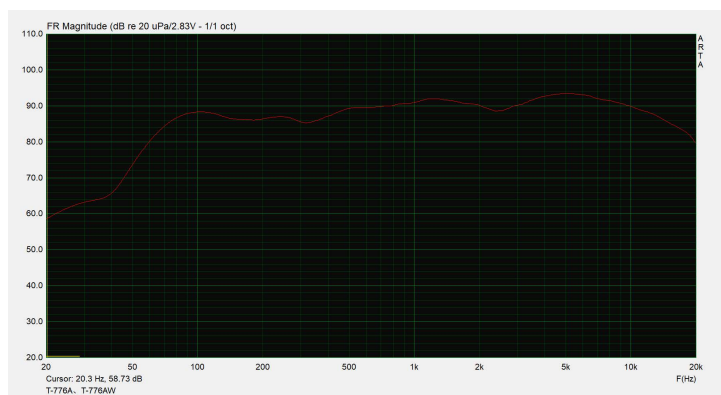

### Description:

Active wall-mounted speakers, powerful functions, a variety of port input, non-balanced input to solve the interference of long-distance transmission signal, left and right channel stereo conversion. Powerful and cost-effective, it is an ideal choice for multimedia. Applicable to places with sound reinforcement requirements such as multimedia classrooms, ordinary classrooms, conference rooms, training rooms, specialty stores, etc.

### Feature:

- \* Multi-channel input function interface: 1 channel stereo balanced input of European terminal, 1 channel stereo 3.5 unbalanced input, left/right channel AUX input, external CD, MP3 and other background music can be connected.
- \* Built-in main volume independent adjustment and high and low volume adjustment.
- \* Stereo and single channel parallel input selection control.
- \* Various displays: power indicator light, left/right channel signal indicator light, etc.
- \* Built-in high-efficiency digital power amplifier and switching power supply circuit, high efficiency, low power consumption, and low heat generation.
- \* Wide power supply: 110-240V/50-60Hz.

### Specification

RMS	25W x 2 @ 8Ω
Input sensitivity	0.35V
Output frequency response	70Hz-20KHz/1W±3dB
THD	≤0.05%@1K
Channel degree of separation	>75dB
S.N. ratio	>85dB
Amplifier	D Class
Indication	Power and channel signal
Protection	Over-temperature protection, overload protection, mute on and off
Treble control	±10dB
Bass control	±10dB
Input connector	European terminal balance, lotus seat, stereo 3.5 jack
AC power supply	~110-240V 50Hz~60Hz
Dimensions(LxWxH)	216 ×245 ×295mm
Net weight	7.5kg (per pair)