




# 2 Mini Stereo Class-D Amplifier

## (Unbalanced inputs + Auto power on/off)

### T-221AP

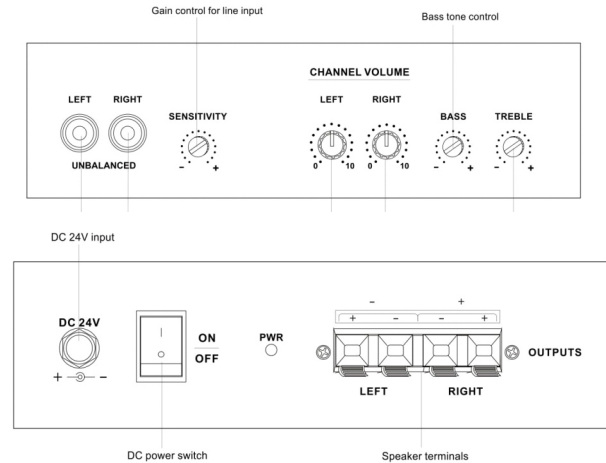

### Features:

- \* Mini-size Class D amplifier.
- \* Stereo output 20 watts by two channels at 4Ω.
- \* Wall mounted design with bracket.
- \* High efficient about 85%, low heat-generation technology.
- \* Environment-protection green technology to save power consumption.
- \* Stereo RCA unbalanced line level inputs.
- \* Sensitivity control over line inputs.
- \* Independent L/R gain control.
- \* Independent bass and treble control.
- \* Stereo left & right channel outputs.
- \* Built-in intelligent limited to eliminate the earth line noise when connected with laptop and iphone.
- \* Automatic power on when input signal is detected.
- \* Automatic power off when no inputs for 5 minutes.
- \* Output will be delayed after fully power on.
- \* Convenient push terminal speaker outputs.
- \* Overload, high temp and short-circuit protection.
- \* DC 24V power adapter is included.

### Specifications

Model	T-221AP
Rated Power Output	2 x 20W (THD10% @ 4Ω1KHz)
Output Impedance	4Ω or 8Ω
Line Input Sensitivity	200mV-2V/10KΩ
Frequency Response	50Hz~18KHz (±2dB)
S/N Ratio	85dB
THD	≤0.5% at 1KHz, 1/3 rated power
Efficiency	≤85%
Controls	Power, input sensitivity, gain control, bass & treble
Indicators	Power
Protection	Overload, high temp and short-circuit
Power Supply	DC 24V, power adapter is supplied compatible of 110V-230V
Dimensions	230 x 115 x 57mm
Finish	Panel: steel, black Case: SPCC Panel