




Remote 4 Zone Paging Microphone

T-4012

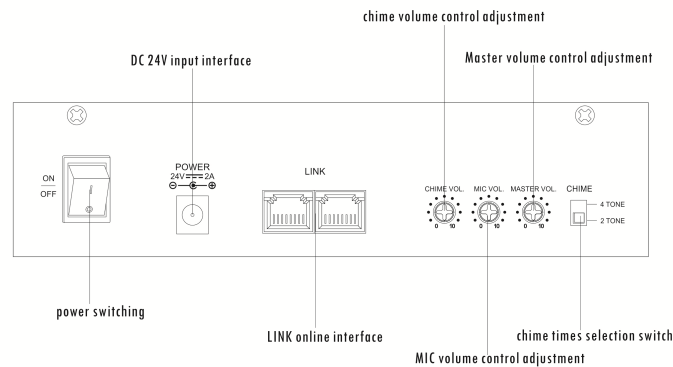

Descriptions:

The T-4012 is a remote paging microphone with 4 zone capacity for T-4060MP and T-4120MP amplifiers only. They are linked by RJ45 port through CAT5 cable, max 6 microphones can be cascaded together for one amplifier.

The microphone is built-in a two & four tone chime selector, it is powered by amplifier at 24V DC. Maximum communication distance is 1km. There are four zone selector, all call, talk and chime push buttons, the 10 segments level meter is supplied to display the output level. Built-in microphone, chime and master volume control.

Features:

- * 4 zone remote paging microphone.
- * With zone, group zone and all zone paging capacity.
- * One amplifier capacity is 4 microphones.
- * The microphone was connected to the amplifier through CAT 5 cable.
- * The microphone is DC24V powered by the amplifier at max 1km distance.
- * Built-in pre announcement chime of 2 & 4 tone selector.
- * With microphone, chime & master volume control.
- * With 10 segments level meter.

Specifications:

Model	T-4012
Mic Type	Condenser microphone
Communication Mode	Level control
Capacity	4 ZONE
Output Level	1V/600Ω
Frequency Response	80Hz~18KHz (+1/-3dB)
THD	≤1%
Power Consumption	10W
Communication Distance	1KM
Power Supply	DC 24V
Dimension	220 x 142.7 x 51.5mm
Weight	1.35Kg (Without Microphone)