

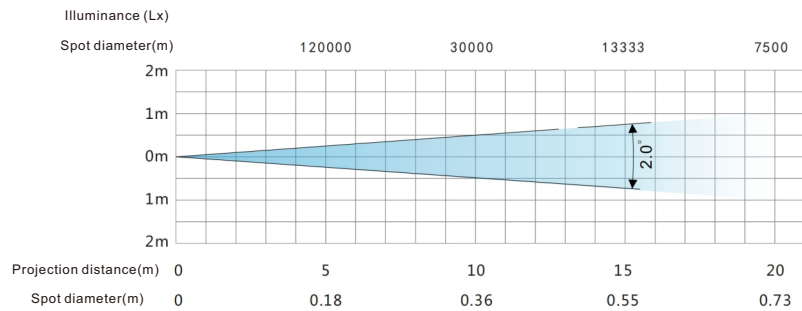


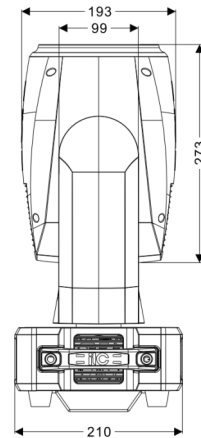

Moving Head Beam Light

TL-SL171

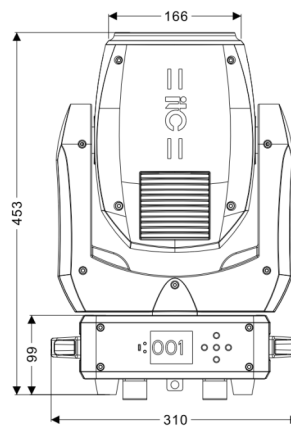

Feature:

- * Optics: 2 sets of lenses (3-layer coating film) with high temperature resistance and strong transmittance.
- * Color wheel: 11 color gels +1 white light, bidirectional rainbow effect, adjustable speed, and flexible positioning function.
- * Fixed gobo wheel: 14 fixed gobos +1 white light, one-way flow, adjustable speed, and flexible positioning function.
- * Prism: octagonal rotating prism + 4 row lens, bidirectional rotation, superimposition effect, and adjustable speed.
- * Strobe: synchronous, asynchronous, random strobe modes, and adjustable speed.
- * Atomization: 1 independent atomization effect with soft and natural light spots.
- * Scanning range: X axis 540°/2.7S(optional 630°), Y axis 270°/1.5S, accurate scanning positioning.
- * Display interface: a wide-screen 2.4-inch LCD interface in Chinese and English, with rechargeable battery, you can enter the menu to set the address code and perform other settings without powering on; the menu is hierarchically structured and has a friendly graphical interface.
- * Intelligent heat dissipation: using wind direction drainage and temperature intelligent monitoring technology, built-in NTC temperature control function, when the LED is overheated, it will intelligently reduce the output power.
- * Autofocus: 3-25.5 meters autofocus, the focusing lens automatically adjusts the clearness state according to the installation height.
- * Signal failure detection: the signal failure time detection system can quickly troubleshoot the lamp usage or communication problems, and prompt the service lifespan of the light source.

Specifications:

Model	TL-SL171
Input voltage	AC110V-240V 50/60Hz, 150W
Light source	Appotronics 100W LED module
Average lifespan	50000H
Color temperature	10000K
Beam angle	2.0°
Control mode	DMX512 protocol, support RDM protocol and online program update, support Art-net Ethernet data interface (DMX wireless function, optional)
Channel	15/13 channels
Fixture material	High temperature resistant plastic + molded alloy material
Protection level	IP20
Fixture size (L×W×H)	310×210×466mm
Package size (L×W×H)	385×365×490mm
Gross weight	15.1kg
Net weight	12.5kg