

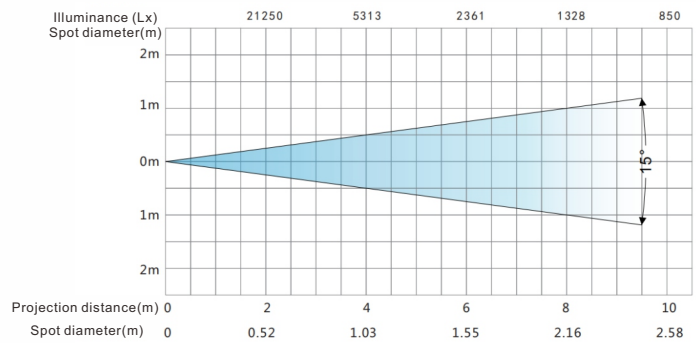





Static wash light

TL-SL206



Feature:

- * Strobe: independent electronic strobe 1-25Hz.
- * Color mixing: RGBW (red, green, blue and white) linear color mixing, 16.7 million colors (0-100% saturation adjustment), and built-in macro function.
- * Electronic dimming: 0-100% independent electronic linear dimming, providing flicker-free video for accurate recording, with master-slave automatic synchronization function. The control console allows normal control with permanent synchronization of the self-propelled feature.
- * LCD menu: invoke various scenes; built-in programs can be directly invoked and executed.
- * Fixture connection: three-core signal line IN/OUT and power line IN/OUT.
- * Features: cast aluminum housing, high light efficiency, uniform light mixing, stable performance, and comes with a 1.3-meter long power and signal cable with one input and one output hand grip.
- * Voice control sensitivity: 65-130dB.
- * Over-temperature protection function: built-in NTC temperature control function; when the LED is overheated, the output power will be intelligently reduced.

Specifications:

Model	TL-SL206
Input voltage	AC 110-240V 50/60Hz, 230W
Light source	90×3W LED(R24+G24+B24+W18)
Average lifespan	50000H
Color temperature	3200K~7200K linear adjustment
Beam angle	Beam angle 15°, spot angle 30°
Control mode	Multiple voice control, DMX512, built-in self-propelled program, master-slave online mode, support RDM protocol and program online update function
Channel	4/8/9 channels
Fixture material	Cast aluminum housing
Protection class	Fireproof V-1, protection IP20
Fixture size (L×W×H)	328×267×294mm
Package size (L×W×H)	690×390×350mm
Gross weight	13.3kg(2PCS)
Net weight	5.5kg